

DS-KAD706-S Video/Audio Distributor



Key Feature


- 6 cascade interfaces used for connecting with DS-KAD706 and DS-KAD706-S
- 6 interface indicators for displaying network status

Specification

Model		DS-KAD706-S
Interface	Network interface	1, RJ45 (1-ch reserved terminal and 1 for WAN access)
	2-Wire interface	6-ch for data exchanging
	Reset	1
	Signal indicator	6 indicators for displaying 6-ch signals
	Power indicator	1
General	Power supply	24 VDC
	Power consumption	< 7 W
	Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
	Working humidity	10% to 90%




Typical Application

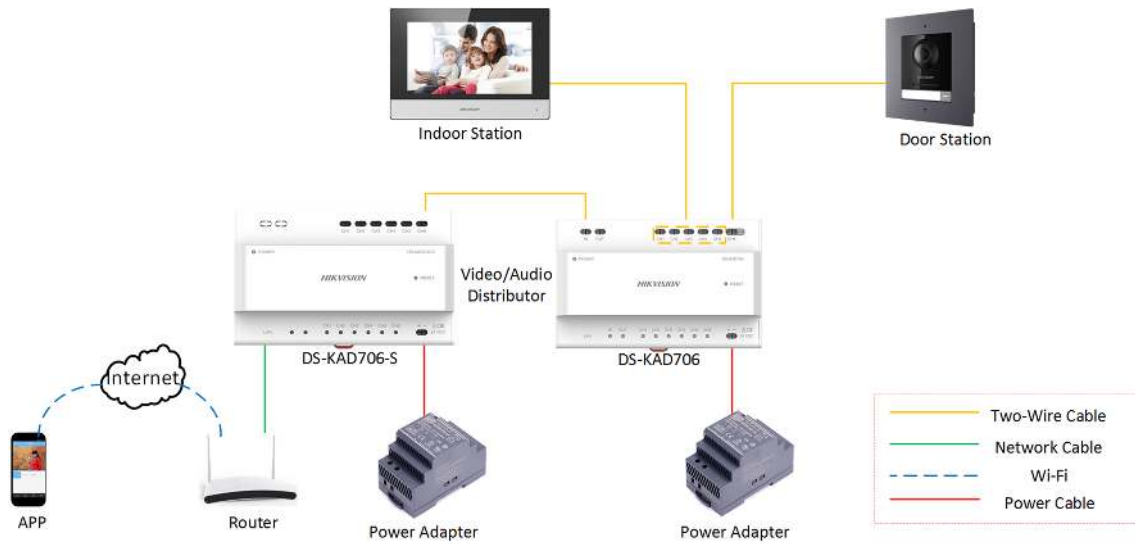

Available Model

DS-KAD706-S

Physical Interface

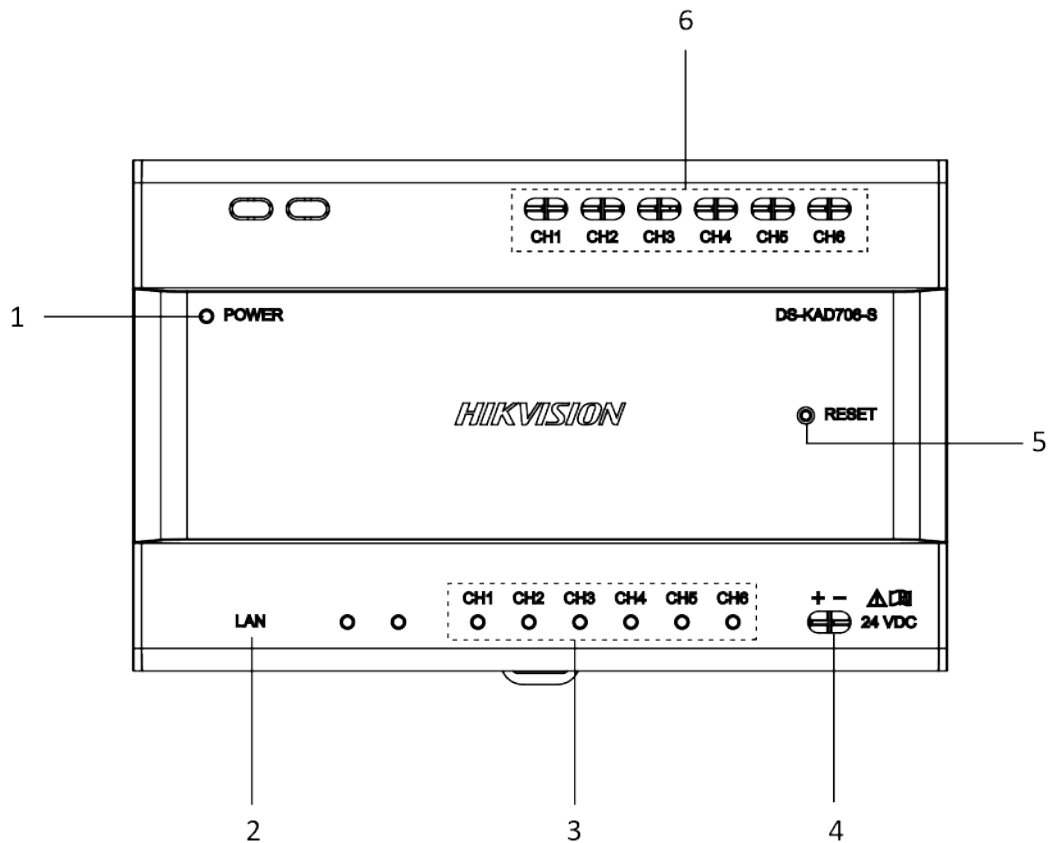

No.	Description
1	Power Indicator
2	Network Interface
3	Network Indicator
4	Power Input
5	Reset Button
6	Interface

HIKVISION

Distributed by:

www.netdigital.com.au